



ELIA DL

GEWISS

Elia is the family of GEWISS products designed for **fast and easy installation** and **with a 5 year guarantee**.

Elia DL – Downlight Led - is the downlight designed for the service sector. Flexible and suitable for any kind of context, it guarantees great energy savings and low maintenance.

The advantages of ELIA DL



Relamping

The ELIA DL range offers excellent efficiency/cost, for the replacement of conventional lamps, with a quick payback.



Quality guarantee

ELIA DL is one of GEWISS' high quality LED luminaire ranges, designed to guarantee maximum reliability and innovation, in terms of individual components and product quality.



Easy installation

The ELIA DL spring system offers quick, simple and effective installation on a variety of panel thicknesses.




Versatile

ELIA DL is available in two power options and two Colour Rendering Index types. With its high power LED, this luminaire is highly energy efficient, offering a high level of light quality with energy savings.

Payback example - hotel hall project 500 lx


- Calculation base: replacement of 40 traditional lighting fixtures
- Operating period: 6,000 hours per year
- ROI (Return On Investment): just over one year and half

Energy cost: source Eurostat

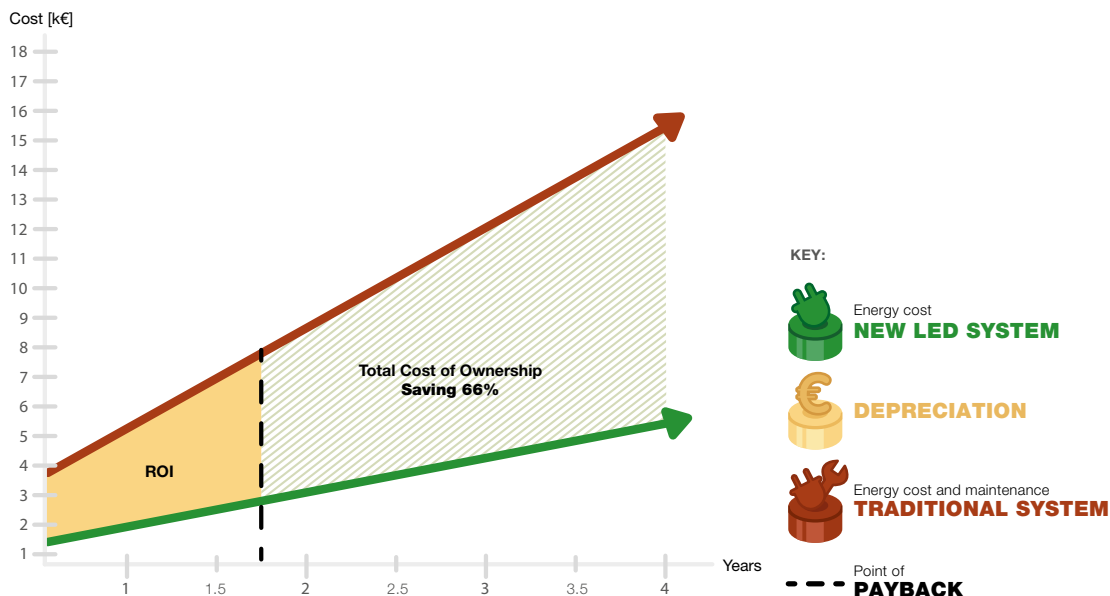


Dimensions

M2 - L2

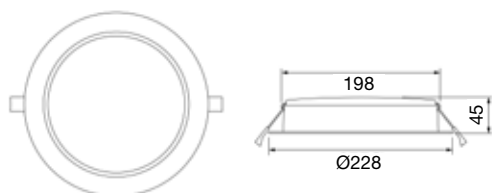

Photometry



Opal

Discover the full **ELIA DL** range on www.gewiss.com

Code	Size	Power (W)	Optic	Luminous flux (lm)	Colour rendering index (CRI)	Control system
GWF1510MA840	M2	25	Opal	2,600	80	On/Off
GWF1510MA940				2,400	90	
GWF1511MA840				2,600	80	DALI
GWF1511MA940				2,400	90	
GWF1510QA840	L2	35	Opal	3,600	80	On/Off
GWF1510QA940				3,300	90	
GWF1511QA840				3,600	80	DALI
GWF1511QA940				3,300	90	

Technical features

- Colour temperature: 4,000 K
- Lifetime: L80B50 (Tq= 25°C) = 50,000 h
- Step McAdam: 5 SDCM
- Operating temperature (Ta): - 20°C + 45°C



Visit www.gewiss.com and follow us on:    