



CorePro Plastic LEDcandles & lusters



CorePro candle ND 5-40W E14 827 B35 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters and are available in multiple color temperatures. LED lamps deliver huge energy savings of up to 80% energy-saving compared with halogen lamps and provide excellent quality of light. By offering a lifetime of 15,000 hours it lowers maintenance costs. The CorePro LED candles and lusters are perfect for your basic lighting needs.

Product data

General Information		Flickering value (PstLM) - Flickering value as per EN 61000-3-3	
Cap-Base	E14	Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Nominal lifetime	15,000 hour(s)	Stroboscopic effect visibility measure (SVM)	0.4
Switching Cycle	50,000	Photobiological safety according to EN 62471	RG1
Lighting Technology	LED	Operating and Electrical	
CE mark	Yes	Line Frequency	50 to 60 Hz
EU RoHS compliant	Yes	Input Frequency	50 to 60 Hz
		Power Consumption	5 W
		Lamp Current (Nom)	44 mA
		Wattage Equivalent	40 W
		Starting Time (Nom)	0.5 s
		Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.51
		Voltage (Nom)	220-240 V
Light Technical			
Color Code	827 [CCT of 2700K]		
Luminous Flux	470 lm		
Color Designation	Warm White (WW)		
Correlated Color Temperature (Nom)	2700 K		
Luminous Efficacy (rated) (Nom)	94.00 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	80		
LLMF At End Of Nominal Lifetime (Nom)	70 %		

CorePro Plastic LEDcandles & lusters

Temperature

T-Case Maximum (Nom)	81 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
-------------	---------

Bulb Shape	B35
------------	-----

Approval and Application

Energy Efficiency Class	F
-------------------------	---

Energy Consumption kWh/1000 h	5 kWh
-------------------------------	-------

EPREL Registration Number	453199
---------------------------	--------

EyeComfort	Yes
------------	-----


Application Conditions

can it be used in closed luminaires	No
-------------------------------------	----

Product Data



Order product name	CorePro candle ND 5-40W E14 827 B35 FR
Full product name	CorePro candle ND 5-40W E14 827 B35 FR
Full product code	871951431250000
Order code	929002968402
Material Nr. (12NC)	929002968402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514312500
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514312517

Dimensional drawing



Product	D	C
CorePro candle ND 5-40W E14 827 B35 FR	45 mm	87 mm

Photometric data

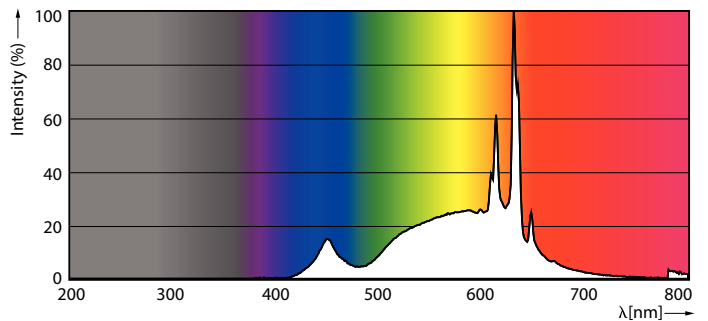


General uniform lighting - CorePro candle ND 5-40W E14 827 B35 FR

Spectral Power Distribution Colour - CorePro candle ND 5-40W E14 827 B35 FR

CorePro Plastic LEDcandles & lusters

Photometric data

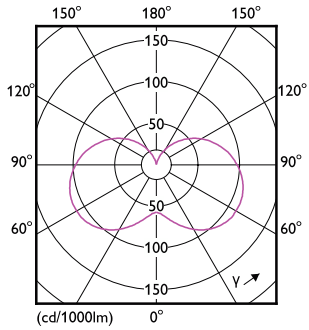

Light Distribution Diagram - CorePro candle ND 5-40W E14 827 B35 FR

Lifetime



Life Expectancy Diagram - CorePro candle ND 5-40W E14 827 B35 FR



Lumen Maintenance Diagram - CorePro candle ND 5-40W E14 827 B35 FR

