



# MASTER PL-C 4 Pin

## MASTER PL-C 13W/840/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

### Product data

General Information		LLMF 6000 h Rated		LLMF 8000 h Rated	
Cap-Base	G24Q-1 [ G24q-1]		83 %		81 %
Life To 50% Failures Preheat (Nom)	13000 h				
LSF Preheat 2000 h Rated	99 %	<b>Operating and Electrical</b>			
LSF Preheat 4000 h Rated	98 %	Power (Rated) (Nom)	13.0 W		
LSF Preheat 6000 h Rated	97 %	Lamp Current (Nom)	0.170 A		
LSF Preheat 8000 h Rated	90 %	<b>Temperature</b>			
<b>Light Technical</b>		Design Temperature (Nom)	28 °C		
Color Code	840 [ CCT of 4000K]	<b>Controls and Dimming</b>			
Luminous Flux (Nom)	925 lm	Dimmable	Yes		
Luminous Flux (Rated) (Nom)	925 lm	<b>Mechanical and Housing</b>			
Color Designation	Cool White (CW)	Cap-Base Information	4 Pins		
Chromaticity Coordinate X (Nom)	380	<b>Approval and Application</b>			
Chromaticity Coordinate Y (Nom)	380	Energy Efficiency Label (EEL)	A		
Correlated Color Temperature (Nom)	4000 K	Mercury (Hg) Content (Nom)	1.4 mg		
Luminous Efficacy (rated) (Nom)	69 lm/W				
Color Rendering Index (Nom)	82				
LLMF 2000 h Rated	92 %				
LLMF 4000 h Rated	87 %				

# MASTER PL-C 4 Pin


Energy Consumption kWh/1000 h	15 kWh
<b>Product Data</b>	
Full product code	871150062332470
Order product name	MASTER PL-C 13W/840/4P 1CT/5X10BOX
EAN/UPC - Product	8711500623324
Order code	927907184040

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927907184040
Net Weight (Piece)	49.900 g
ILCOS Code	FSQ-13/40/1B-E-G24q=1

## Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




PL-C 13W/840/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/840/4P 1CT/5X10BOX	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm

## Photometric data

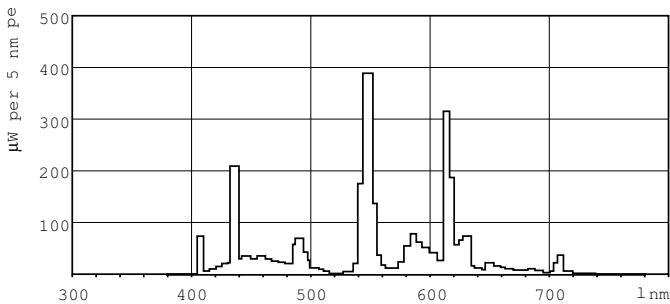



Lightcolor /840

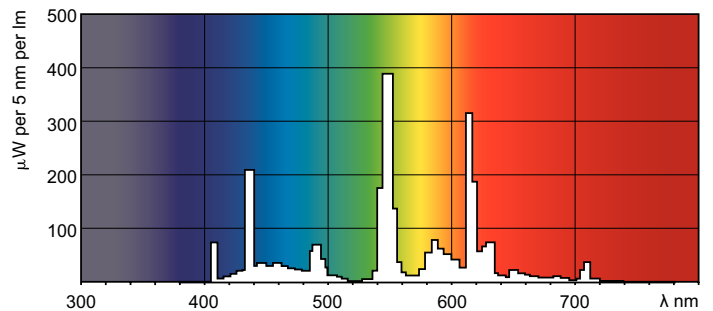

Lightcolor /840


# MASTER PL-C 4 Pin

## Lifetime

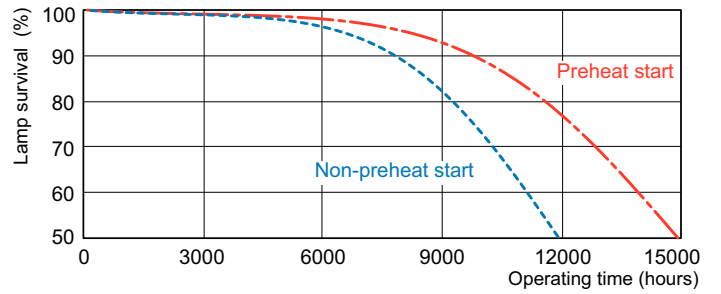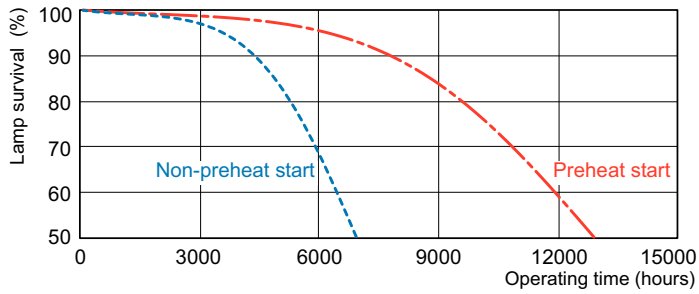

### Life Expectancy 3 h cycle

### Life Expectancy 12 h cycle

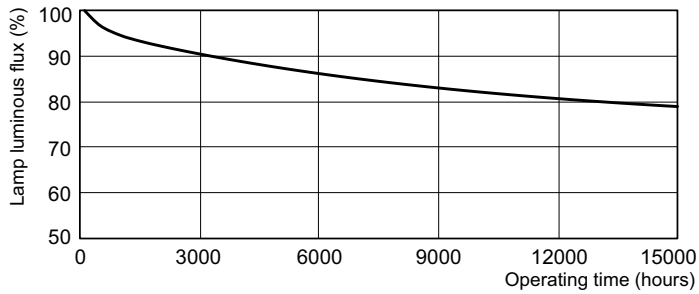

### Lumen Maintenance 3 h and 12 h cycle

